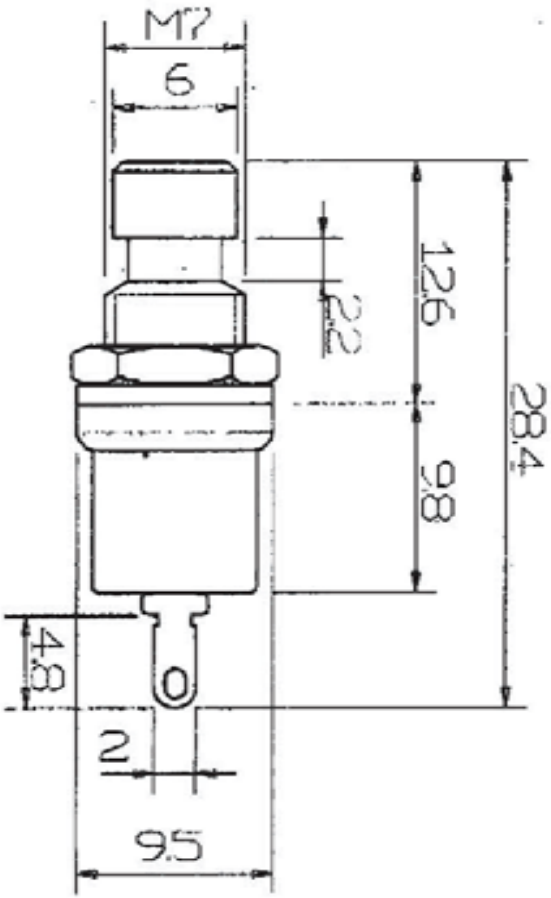





1. Rating	1A 125V AC / 0.5A 250V AC
2. Circuit	2P (SPST)
3. Function	Push-(OFF) Momentary
4. Contact Resistance	2.5V DC 1A 10mΩ or less
5. Insulation Resistance	500V DC 100 MΩ or more
6. Voltage Breakdown	1500V AC 1 min
7. Mtg. Hole Dial mm.	7 ϕ mm
8. Mtg. Centers mm.	(IN CASE PANEL THICK 1~2 mm)
9. Button Color	Black / Red

REVISION	DESCRIPION	REVISED BY	TOLEANCES .X .XX ANGLE ½°					UNIT mm	PART NAME	PS17-5 SPEC DRAWING	DWG NO
4			DRAWN BY		DESIGNED BY		SCALE				WS0204A
3											
2			CHECKED BY		APPROVED BY		DATE	2005.12.07	PART NO	PS17-5A	
1 2005.12.07	換新圖框,重新出圖	吳美玉									